


125-POUND CAST IRON GLOBE VALVES

Outside screw and yoke, rising stem, bolted bonnet, flanged ends.

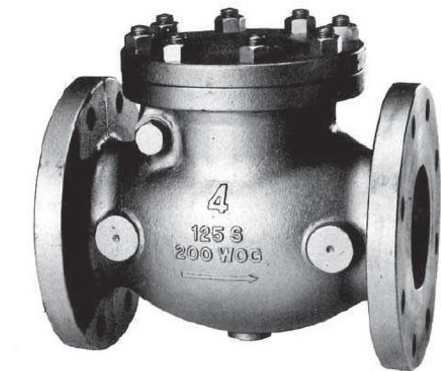

WORKING PRESSURES

Service Temperature		Sizes 2" to 12"	
iF	iC	Psig	Bar
-20 to 150	-29 to 66	200	13.7
200	93	190	13.1
225	107	180	12.4
250	121	175	12
275	135	170	11.7
300	149	165	11.3
325	163	155	10.6
353(5)	178	150	10.3
375	191	145	10.0
406(6)	208	140	9.6
425	218	130	8.9
450	232	125	8.6
Hydrostatic	Shell	350	24.1
test pressure	Seat	200	13.7

MATERIAL

No.	Name of parts	ASTM Specifications	
1	Body	Cast iron	A126 Class B
2	Body seat ring	Cast Bronze	B62-C83600
3	Disc seat ring	Cast Bronze	B62-C83600
4	Disc	Cast iron	A126 Class B
5	Guide spindle	Brass	B16-C36000
6	Disc nut	Brass	B16-C36000
7	Washer	Brass	B16-C36000

1. Pressure-temperature ratings extracted from ASME B16.1 apply to cast iron flanged end valves designed for primary working pressures in Class 125.

2. Pressure ratings specified above are used for cast iron valves with metal-to-metal seating surfaces.

Pressure-temperature ratings for cast iron valves with non-metallic seat materials must be limited to reflect the physical characteristics of these materials at each temperature and may be lower, but in no case higher than values shown in the above table.

3. The temperature shown to a corresponding pressure rating shall be the metal temperature of pressure containing parts. It shall be assumed that the metal temperature will be the temperature of the contained fluid. Application of a pressure rating at a metal temperature other than that of the contained fluid is strictly limited to the responsibility of the user.


4. The pressure rating in service shall be restricted to the minimum temperature of -20 iF (-29 iC) as shown above.

5. 353 iF (Max.) to reflect the temperature of saturated steam at 125 psig.

6. 406 iF (Max.) to reflect the temperature of saturated steam at 250 psig.

MATERIAL

No.	Name of parts	ASTM Specifications	
1	Body	Cast iron	A126 Class B
2	Body seat ring	Cast Bronze	B62-C83600
3	Disc seat ring	Cast Bronze	B62-C83600
4	Disc	Cast iron	A126 Class B
5	Guide spindle	Brass	B16-C36000
6	Disc nut	Brass	B16-C36000
7	Washer	Brass	B16-C36000
8	Stem	Brass	B16-C36000
9	Bonnet bush	Brass	B16-C36000
10	Bonnet bolt	Steel*	A307 Grade B
11	Bonnet Bolt nut	Steel*	A307 Grade B
12	Packings	Non-asbestos packings	
13	Gland	Brass	B16-C36000
14	Gland flange	Ductile iron	A536
15	Gland bolt	Steel*	A307 Grade B
16	Gland bolt nut	Steel*	A307 Grade B
17	Bonnet	Cast iron	A126 Class B
18	Stem nut	Brass	B16-C36000
19	Set screw	Steel*	A307 Grade B
20	Hand wheel	Cast iron	A126 Class B
21	Name plate	Aluminum	
22	Wheel nut	Steel*	A307 Grade B

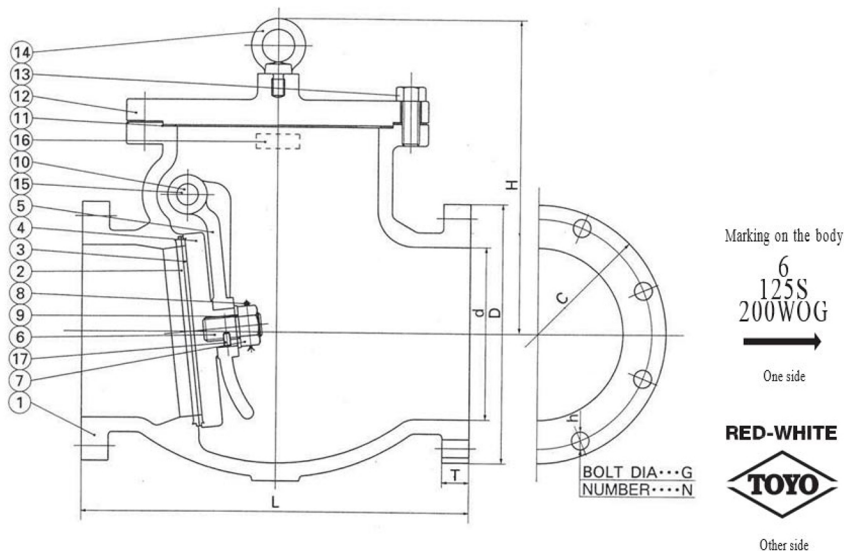**Note:**

1. Face-to-face dimensions conform ASME B 16. 10.
2. End flange dimensions and drillings conform to ASME B 16.1 End flanges are fully flat faced and smoothly finished in accordance with MSS SP-6.
3. JIS10K and BS/DIN PN16 flanged ends are available upon request.
4. Drain boss and by-pass bosses are available upon request.
5. Valves conform to MSS SP-71.

DIMENSIONS

Size (in)	Mark (mm)	L	H	Flanges				
				D	C	T	N	h
2	in.	8	6.02	6.00	4.75	0.62	4	0.75
	mm	203	153	152	121	15.9		19.0
2 1/2	in.	8.5	6.34	7.00	5.50	0.69	4	0.75
	mm	216	161	178	140	17.5		19.0
3	in.	9.5	6.89	7.50	6.00	0.75	4	0.75
	mm	241	175	191	152	19.0		19.0
4	in.	11.5	8.62	9.00	7.50	0.94	8	0.75
	mm	292	219	229	191	23.8		19.0
5	in.	13	8.86	10.00	8.50	0.94	8	0.88
	mm	330	225	254	216	23.8		22.2
6	in.	14	10.08	11.00	9.50	1.00	8	0.88
	mm	356	256	279	241	25.4		22.2
8	in.	19.5	11.73	13.50	11.75	1.12	8	0.88
	mm	495	298	343	299	28.6		22.2
10	in.	24.5	14.8	16.00	14.25	1.19	12	1.00
	mm	622	376	406	392	30.2		25.4
12	in.	27.5	16.14	19.00	17.00	1.25	12	1.00
	mm	698	410	483	432	31.8		25.4

Related: globe valve, toyo